

TYPE G3**PRODUCT USES**

The unit is designed to fit any existing chamber ladder. When sited over the chamber ladder, facilitates ease of entry/exit when in the upright position. When in the down position, acts as a safety grid.

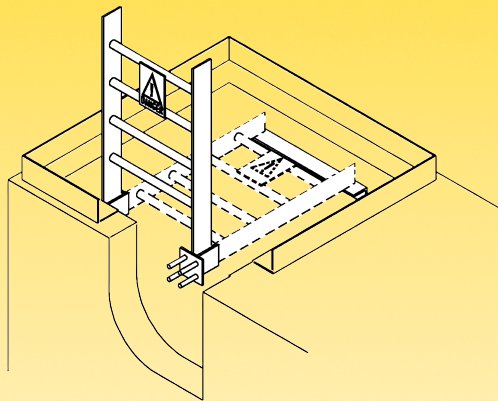
STANDARD PRODUCT FEATURES

- Single unit, hinged.
- To fit any chamber size
- To be fitted directly over chamber ladder. Position to be advised of prior to manufacture
- Functions as a ladder extension/handhold in the upright position
- Can be locked in the upright position with cover padlock. Accessory reference /L9
- BS 5378 Danger Sign included
- Complete with anchor bolts and stop/support bracket.
- Manufactured from minimum 4mm steel plate
- Hot dip galvanised after manufacture to BS EN ISO 1461

Note: Stainless steel grade 316-M12x100 bolts are supplied. However, if chamber walls are not in a state of good repair, or of soft substance, longer bolts are to be advised. - Please notify.

ULTRASECURE LADDER/SAFETY GRID

• HINGED • FOR FITTING TO
EXISTING CHAMBER •

**AVAILABILITY**

Delivery is normally within 3 weeks (or to clients requirements) from receipt of order and is generally supplied direct to site or supply & fit.

ALTERNATIVE MATERIALS

Stainless steel - Specifying code = /S316
Specifying code = /S304

For specifying one of the above, add the code as an end addition to the full specifying code.

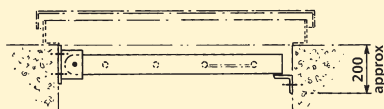
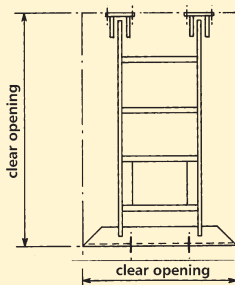
HOW TO ORDER/SPECIFY

Progression example for specifying:

1. Product Type: G3
2. Add clear opening size i.e. 600 x 600mm =/60-60
3. Add accessory: i.e. /L9 lock

Full reference: G3/60-60/L9

Note: If chamber is not square, the unit will be hinged down the longest dimension (unless otherwise stated).

**SECTION/PLAN DETAILS**

01/07/03

ALL TECHNICAL DETAILS ARE COPYRIGHT, AND MUST NOT BE REPRODUCED WITHOUT PRIOR CONSENT