


01/07/03

SECURITY AND GENERAL FEATURES OF THE TECHNORAIL ULTRASECURE UNH COVER RANGE

- UPSTAND • HIDDEN HINGE • DEEP FRAME •

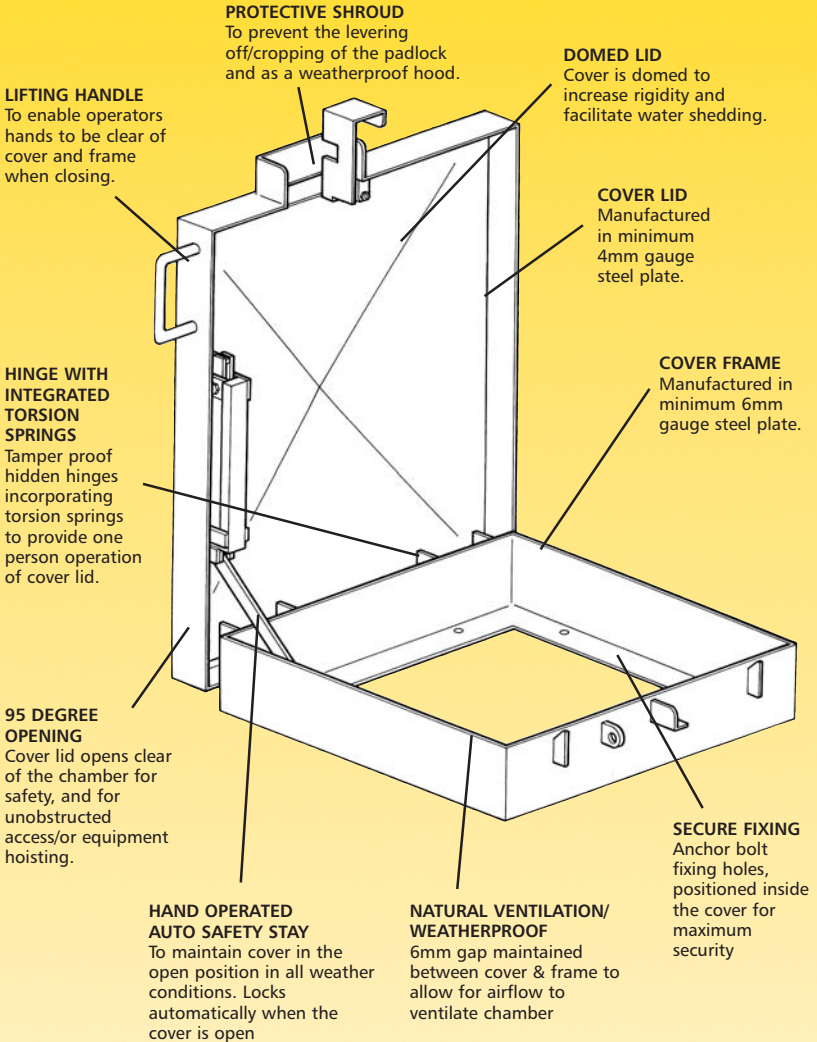

TYPE UNH1

TECHNICAL DETAILS

Units are manufactured from minimum 4 mm steel plate and are Hot Dip Galvanised after manufacture to BS EN ISO 1461. Products conform to all health and safety single person manual handling regulations.

ACCESSORIES

- /C1 Chequer top
- /G1 Hinged ladder/safety grid
- /G2 Drop-on walk on safety grid
- /G4 Hinged walk on safety grid
- /H2 End hinged (on shorter dimension)
- /D1 Service ID
- /P1 Peep hole facility
- /L9 Safety grid padlock
- /L7 Locking on top
- /F1 Deeper frame (please specify)-see below
- /F3 Full skirt (please specify)-see below
- /RHO Right hand opening (left as standard)
- /XP Paint colour (please specify)

ALTERNATIVE MATERIALS

Stainless steel - Specifying code = /S316
Specifying code = /S304

For specifying one of the above, add the code as an end addition to the full specifying code.



HOW TO ORDER/SPECIFY

Progression example for specifying

1. Select Product Reference: UNH1
2. Add clear opening size i.e. 80-70
4. Add accessory i.e. /G1

Full reference: UNH1/80-70/G1

SECTION/PLAN DETAILS

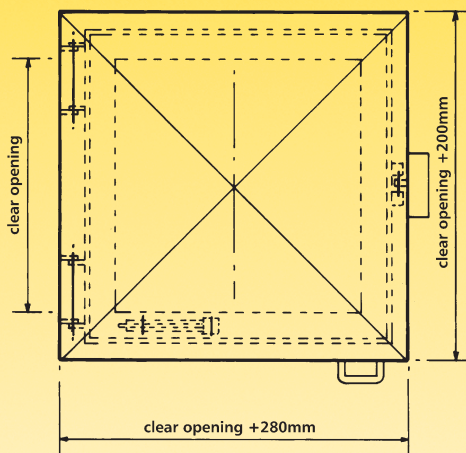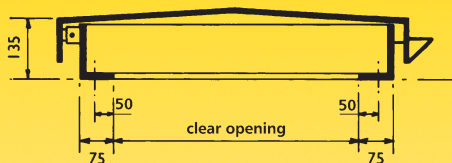


F1

Deeper frame depth
Used for existing concrete slabs at or below ground level.

Extra personnel safety
Specifying code = /F1 + dimension x
(eg. 300mm)

Full accessory reference: /F1/30



F3

Full skirt for concrete protection and added security

As standard in chequer plate
Specifying code = /F3 + dimension x
(eg. 300mm)

Full accessory reference: /F3/30

