



SECURITY AND GENERAL FEATURES OF THE TECHNORAIL ULTRASECURE DOOR RANGE


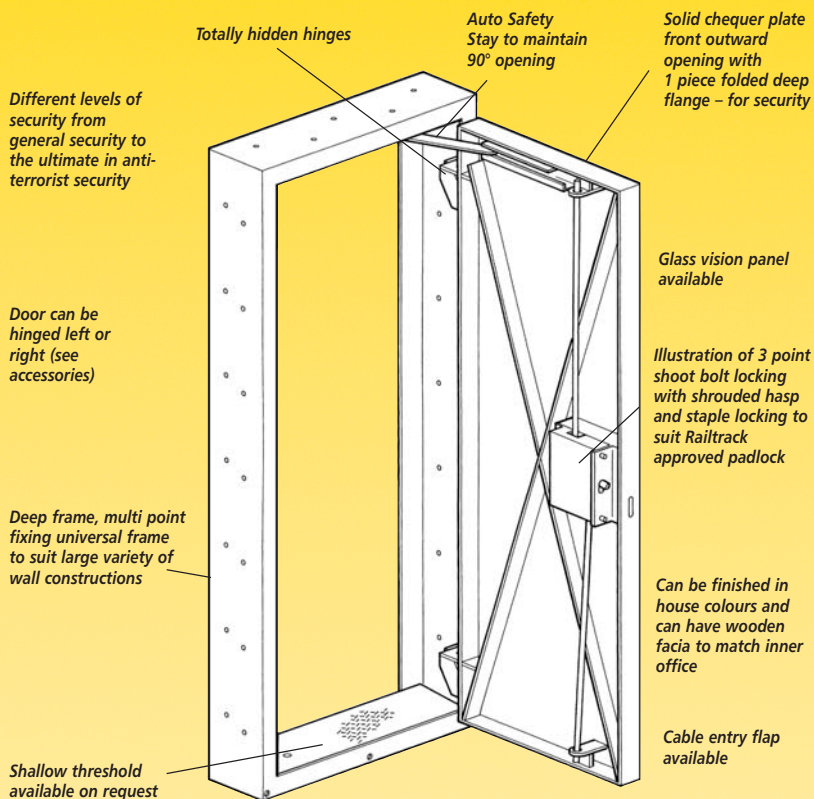


- ALL DOORS ARE MADE TO SUIT INDIVIDUAL CUSTOMER REQUIREMENTS •
 - LASER CUT IDENTIFICATION TO CUSTOMER REQUIREMENTS •
 - LOUVRE VENTS ACCESSORY POSITIONED WHERE REQUIRED •
 - HOT DIP GALVANISED AFTER MANUFACTURE TO BS EN ISO 1461 •
- EXTERNAL PAINT FINISHES ARE AVAILABLE FOR AESTHETIC APPEARANCE IF REQUIRED •
 - ALTERNATIVE MATERIALS AVAILABLE ON REQUEST •

ULTRASECURE TWIN LEAF DOOR

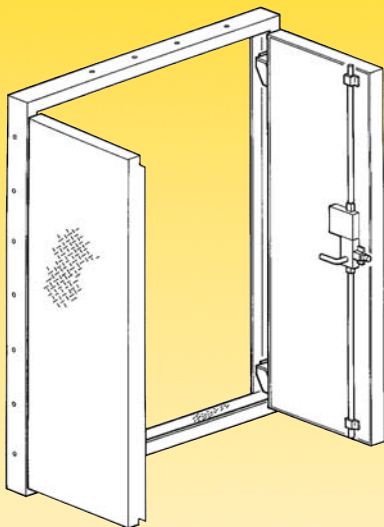

SECTION/PLAN DETAILS



TYPE DS2/LS

PRODUCT USES

Standard heavy duty, steel chequer plate, twin door for situations such as emergency & fire escapes, frequent use restricted personnel access situation when security is paramount

STANDARD PRODUCT FEATURES

- Solid chequer plate front outward opening with 1 piece folded deep flange – for security
- Totally hidden hinges
- Locking system - 3 point proprietary shoot bolt locking system such as surelock McGill or MICO systems, exact type to suit site conditions
- Auto Safety Stay to maintain 90° opening
- Multi point fixing universal frame to suit large variety of wall constructions
- Any size available, please specify
- Optional locking systems – see accessories
- Manufactured from minimum 4mm steel plate
- Plywood facia internal fixing to door
- Hot dip galvanised after manufacture to BS EN ISO 1461
- External paint finishes are available for aesthetic appearance if required and will be applied over etch primer and base coat
- Alternative materials available on request

AVAILABILITY (as standard)

ACCESSORIES

- /D1 Identification marking
- /LV Louvre Vent
- /ALAWINT Alarm Package
- /DP Digital pad locking system
- /SC Swipe card locking
- /XP External paint colour (please specify)
- /ST Shallow Threshold
- /VP Vision Panel

HOW TO ORDER/SPECIFY

- Progression example for specifying
1. Select Product Reference: DS2/LS
 2. Add structural opening i.e. 2150mm High x 1600mm Wide = /215-160
- Add accessory i.e. /LV Louvre Vents

Full reference: DS2/LS/215-160/LV

For specific locking ranges, contact our Technical Department